


TruVision[®] NVR 22

H.265 Network Video Recorder

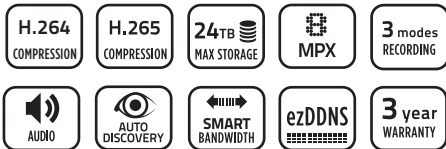

OVERVIEW

The TruVision NVR 22 from Interlogix (TVN 22) is a true H.264/H.265 network video recorder designed to support video streams from H.264 or H.265 IP cameras and encoders. With a total of 80/160 Mbps (8- or 16-channel models) of incoming bandwidth available, the TVN 22 can support up to 16 cameras at HD resolution in real-time (30fps) and many other configurations. Flexible bandwidth allocation per channel allows users to maximize recording performance. In addition, the TVN 22 has familiar front panel controls that allow for easy operation, as well as browser, software and mobile device management tools.

IP camera support includes resolutions ranging from standard VGA to 8.0 megapixel, including Interlogix[®] and third-party IP cameras via ONVIF. The TVN 22 also supports TruVision encoders for integrating existing analog cameras. Up to four internal hard disk drives may be configured for a total internal hard drive capacity of 24TB, making the TVN 22 ideal for extended storage or megapixel camera applications.

Recording options include continuous, motion, and alarm or combined scheduled recording modes. Motion recording utilizes an IP camera's built-in motion detection events, and alarms can be triggered from any of the 16 on-board alarm inputs or from alarm inputs that reside on the IP camera.

Software connectivity allows remote access to the recorder's full capabilities via Web browser or TruVision Navigator. TruVision Mobile also allows for remote device access. Configuration is quick and easy through startup wizards, IP device auto-discovery tools and ezDDNS service.

**Support from third-party IP cameras may vary.*

STANDARD FEATURES

Camera Support

- TruVision IP cameras from VGA ~ 8MPx
- TruVision single and multi-port encoders
- ONVIF Profile S support for 3rd-party camera integration
- RTSP Stream capability

Recording Capabilities

- H.264/H.265 compression supported
- Up to 8/16 HD cameras in real-time (30fps)
- 80/160Mbps for incoming streams
- Continuous, motion, event or scheduled recording modes
- Audio recording with capable IP cameras
- Watermarking for video authentication
- Up to 24TB of storage with front accessible hard disk storage
- External hard drive (eSATA) support
- Local USB archiving

Installation and Operation

- Rack mountable – 1.5 RU
- Intuitive and logical user interface
- ezDDNS

Local or Remote Control and Monitoring

- Triple monitor support – HDMI, VGA and analog
- 16 on-board alarm inputs and 4 configurable alarm outputs
- PTZ and dome camera control via mouse, front panel, IR remote or optional keypad
- Compatibility with TruVision Navigator and mobile app software
- Mac[®] Safari[®] browser plug-in

Telephone : +6221 5056 0208
Email : info@asiasekuriti.co.id
Website : www.AsiaSekuriti.co.id